

ATPC-1210CB

12.1" Fanless Panel PC



产品特性

- ◆ 选Intel Celeron J4125/J6412或第8/10/11代-U Intel Core i5/i7
- ◆ J4125/J6412: DDR4 SODIMM x1; Core i5/i7: DDR4 SODIMM x2
- ◆ LCD+HDMI! 双显, 同步/异步模式
- ◆ 全平面触摸屏, 前面板IP65防护等级
- ◆ 低功耗无风扇
- ◆ 9 ~ 36V 宽压输入

产品规格

处理器	可选Intel Celeron J4125/J6412 CPU或Intel Core 8/10/11代-U i5/i7 CPU
储存	1 x M.2 2242/2260/2280 SATA 1 x SATA(2.5" SATA) 1 x M.2 2280 NVME
I/O接口	1x HDMI 1xAudio Line-out 2 x 8Ω1W功放输出 (可选) 1 x AT/ATX 拨码开关 1 x 扩展IO: 集成4路3线COM, 10路GPIO, 1个远程开关
内存	J4125/J6412: DDR4 SODIMM x1 Core i5/i7: DDR4 SODIMM x2
以太网网络	2x 2.5 GbE RJ45 Intel®i225V(4 x 2.5GbE RJ45 Intel i225V)
串口	2 x DB-9 COM1&COM2,RS-232/422/485
USB	4 x USB2.0 , 2 x USB3.0 (J4125/J6412) 2 x USB2.0 , 4 x USB3.0 (第8/10/11代Intel Core i5/i7)
扩展插槽	M.2 3042/3052 3G/4G/5G 模块, 板载SIM卡槽 M.2 2230 WiFi蓝牙
电源	DC 9 ~ 36V 4-pin 航插
温度	工作温度: -20℃ ~ 60℃ 存储温度: -30℃ ~ 70℃
湿度	10~90% @30℃, 无凝结
安装方式	VESA 75/ 100 面板安装
尺寸	318.8x245.0x65.5 mm
材质	铝
LCD类型	12.1" TFT-LCD
分辨率	1024x768(可选800x600)
最大颜色	1 6 . 2 M
亮度	500 cd / m ²
视角(CR>=10)	-85~85° (H), -85~85° (V)
背光	LED
背光寿命(小时)	3 0 , 0 0 0



12.1" Fanless Panel PC

ATPC-1210CB


产品规格

触摸屏	规格	
类型	5线电阻式	投射式电容
透过率	78%	大于85%
使用寿命	250克力度点击 1000万次	> 5000万次

产品图



尺寸图

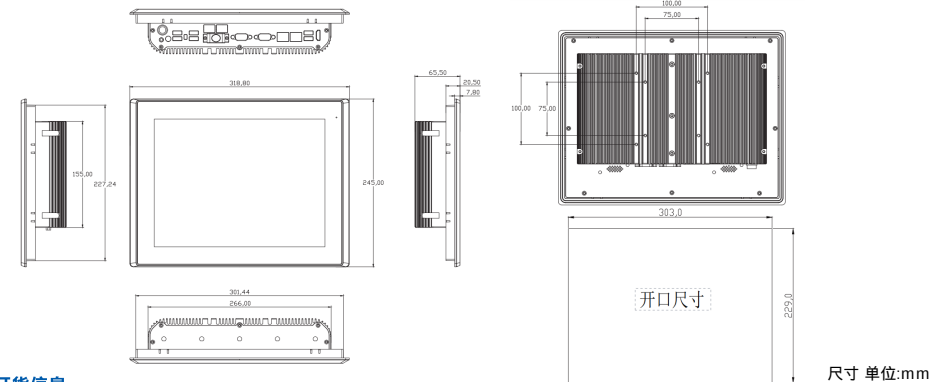

订货信息

型号	说明
ATPC-1210CB-J4125/PC-R10	12.1" TFT LCD 电容触摸 J4125 CPU DDR4x1 2xUSB3.0, 4x USB2.0 2x LAN 6 x COM 1xPower Adapter
ATPC-1210CB-J4125/R-R10	12.1" TFT LCD 电阻触摸 J4125 CPU DDR4x1 2xUSB3.0, 4x USB2.0 2x LAN 6 x COM 1xPower Adapter
ATPC-1210CB-J6412/PC-R10	12.1" TFT LCD 电容触摸 J6412 CPU DDR4x1 2xUSB3.0, 4x USB2.0 2x LAN 6 x COM 1xPower Adapter
ATPC-1210CB-J6412/R-R10	12.1" TFT LCD 电阻触摸 J6412 CPU DDR4x1 2xUSB3.0, 4x USB2.0 2x LAN 6 x COM 1xPower Adapter
ATPC-1210CB-i5-8260U/PC-R10	12.1" TFT LCD 电容触摸 i5-8260U CPU DDR4x2 4xUSB3.0, 2x USB2.0 2x LAN 6 x COM 1xPower Adapter
ATPC-1210CB-i5-8260U/R-R10	12.1" TFT LCD 电阻触摸 i5-8260U CPU DDR4x2 4xUSB3.0, 2x USB2.0 2x LAN 6 x COM 1xPower Adapter
ATPC-1210CB-i5-8365U/PC-R10	12.1" TFT LCD 电容触摸 i5-8365U CPU DDR4x2 4xUSB3.0, 2x USB2.0 2x LAN 6 x COM 1xPower Adapter
ATPC-1210CB-i5-8365U/R-R10	12.1" TFT LCD 电阻触摸 i5-8365U CPU DDR4x2 4xUSB3.0, 2x USB2.0 2x LAN 6 x COM 1xPower Adapter
ATPC-1210CB-i7-8565U/PC-R10	12.1" TFT LCD 电容触摸 i7-8565U CPU DDR4x2 4xUSB3.0, 2x USB2.0 2x LAN 6 x COM 1xPower Adapter
ATPC-1210CB-i7-8565U/R-R10	12.1" TFT LCD 电阻触摸 i7-8565U CPU DDR4x2 4xUSB3.0, 2x USB2.0 2x LAN 6 x COM 1xPower Adapter

ATPC-1210CB

12.1" Fanless Panel PC

产品规格

型号	说明
ATPC-1210CB-I7-8569U/PC-R10	12.1" TFT LCD 电容触摸 i7-8569U CPU DDR4x2 4xUSB3.0, 2x USB2.0 2x LAN 6 x COM 1xPower Adapter
ATPC-1210CB-I7-8569U/R-R10	12.1" TFT LCD 电阻触摸 i7-8569U CPU DDR4x2 4xUSB3.0, 2x USB2.0 2x LAN 6 x COM 1xPower Adapter
ATPC-1210CB-I5-10210U/PC-R10	12.1" TFT LCD 电容触摸 i5-10210U CPU DDR4x2 4xUSB3.0, 2x USB2.0 2x LAN 6 x COM 1xPower Adapter
ATPC-1210CB-I5-10210U/R-R10	12.1" TFT LCD 电阻触摸 i5-10210U CPU DDR4x2 4xUSB3.0, 2x USB2.0 2x LAN 6 x COM 1xPower Adapter
ATPC-1210CB-I5-10310U/PC-R10	12.1" TFT LCD 电容触摸 i5-10310U CPU DDR4x2 4xUSB3.0, 2x USB2.0 2x LAN 6 x COM 1xPower Adapter
ATPC-1210CB-I5-10310U/R-R10	12.1" TFT LCD 电阻触摸 i5-10310U CPU DDR4x2 4xUSB3.0, 2x USB2.0 2x LAN 6 x COM 1xPower Adapter
ATPC-1210CB-I7-10510U/PC-R10	12.1" TFT LCD 电容触摸 i7-10510U CPU DDR4x2 4xUSB3.0, 2x USB2.0 2x LAN 6 x COM 1xPower Adapter
ATPC-1210CB-I7-10510U/R-R10	12.1" TFT LCD 电阻触摸 i7-10510U CPU DDR4x2 4xUSB3.0, 2x USB2.0 2x LAN 6 x COM 1xPower Adapter
ATPC-1210CB-I7-10610U/PC-R10	12.1" TFT LCD 电容触摸 i7-10610U CPU DDR4x2 4xUSB3.0, 2x USB2.0 2x LAN 6 x COM 1xPower Adapter
ATPC-1210CB-I7-10610U/R-R10	12.1" TFT LCD 电阻触摸 i7-10610U CPU DDR4x2 4xUSB3.0, 2x USB2.0 2x LAN 6 x COM 1xPower Adapter